



Features

- RF Power:0.15W Max.
- Pin material:Brass H62.
- Plastic material:PC (ABS) alloy.
- Electrical Interface:3 pins, center ground.
- Body Material/Color:Yellow, Black, Blue, etc
- Operating temperature range:-40°Cto+120°C
- Storage temperature range: -45°C to +125°C
- The plug in Attenuators Bandwidth in 5 to 1794MHz.
- These accessories can be used for node, cable TV units, etc.

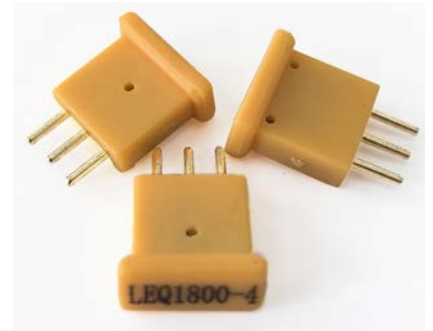

Outline Drawing(mm)

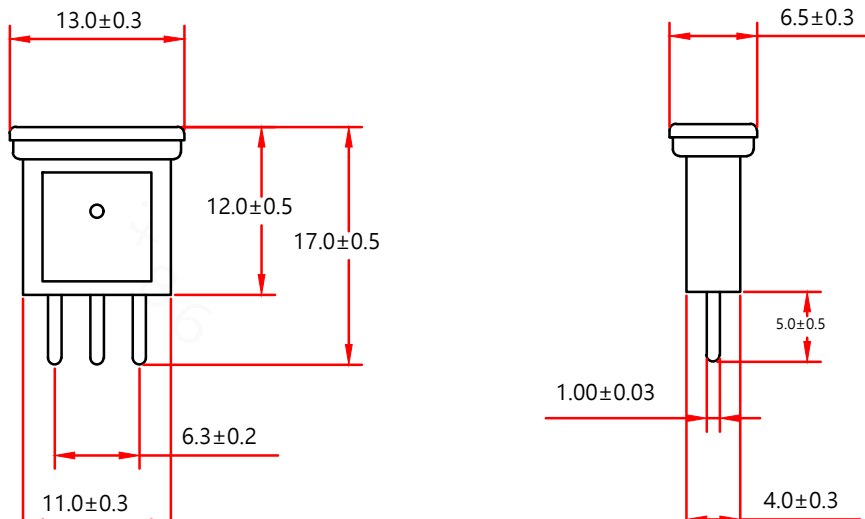

Electrical Specifications: TA=25°C, 0dBm,Z0=75Ω

Parameter	Units	Value														
		2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	
EQ Values(254 - 1794MHz)	dB															
Slope TOL(254 - 1794MHz)	dB	±0.50dB														

Parameter	Conditions	Min	Typ	Max	Units
Frequency Response	-	54	-	1794	MHz
Operating Bandwidth	-	258	-	1794	MHz
Insertion Loss	@ 1794 MHz	-	-	0.80	dB
Flatness	54 to 1794 MHz	-0.40	-	0.40	dB
	258 to 1218 MHz	-0.25	-	0.25	dB
	258 to 1794 MHz	-0.30	-	0.30	dB
Roll-off	1744 to 1794 MHz	0	-	+0.4	dB
Roll-off	1762 to 1794 MHz	0	-	+0.3	dB
Return Loss	54 to 1794 MHz	-	- 20	-18	dB